



230mm

2022 - 2023

00mm

180mm

230mm



SURFACE CEILING LIGHT



APP




Alexa



Google Home



DIMMABLE
Triac / 0-10V / Pre-button




Tri-Color
Pre-Button / Switch



Motion Sensor



Shell Color

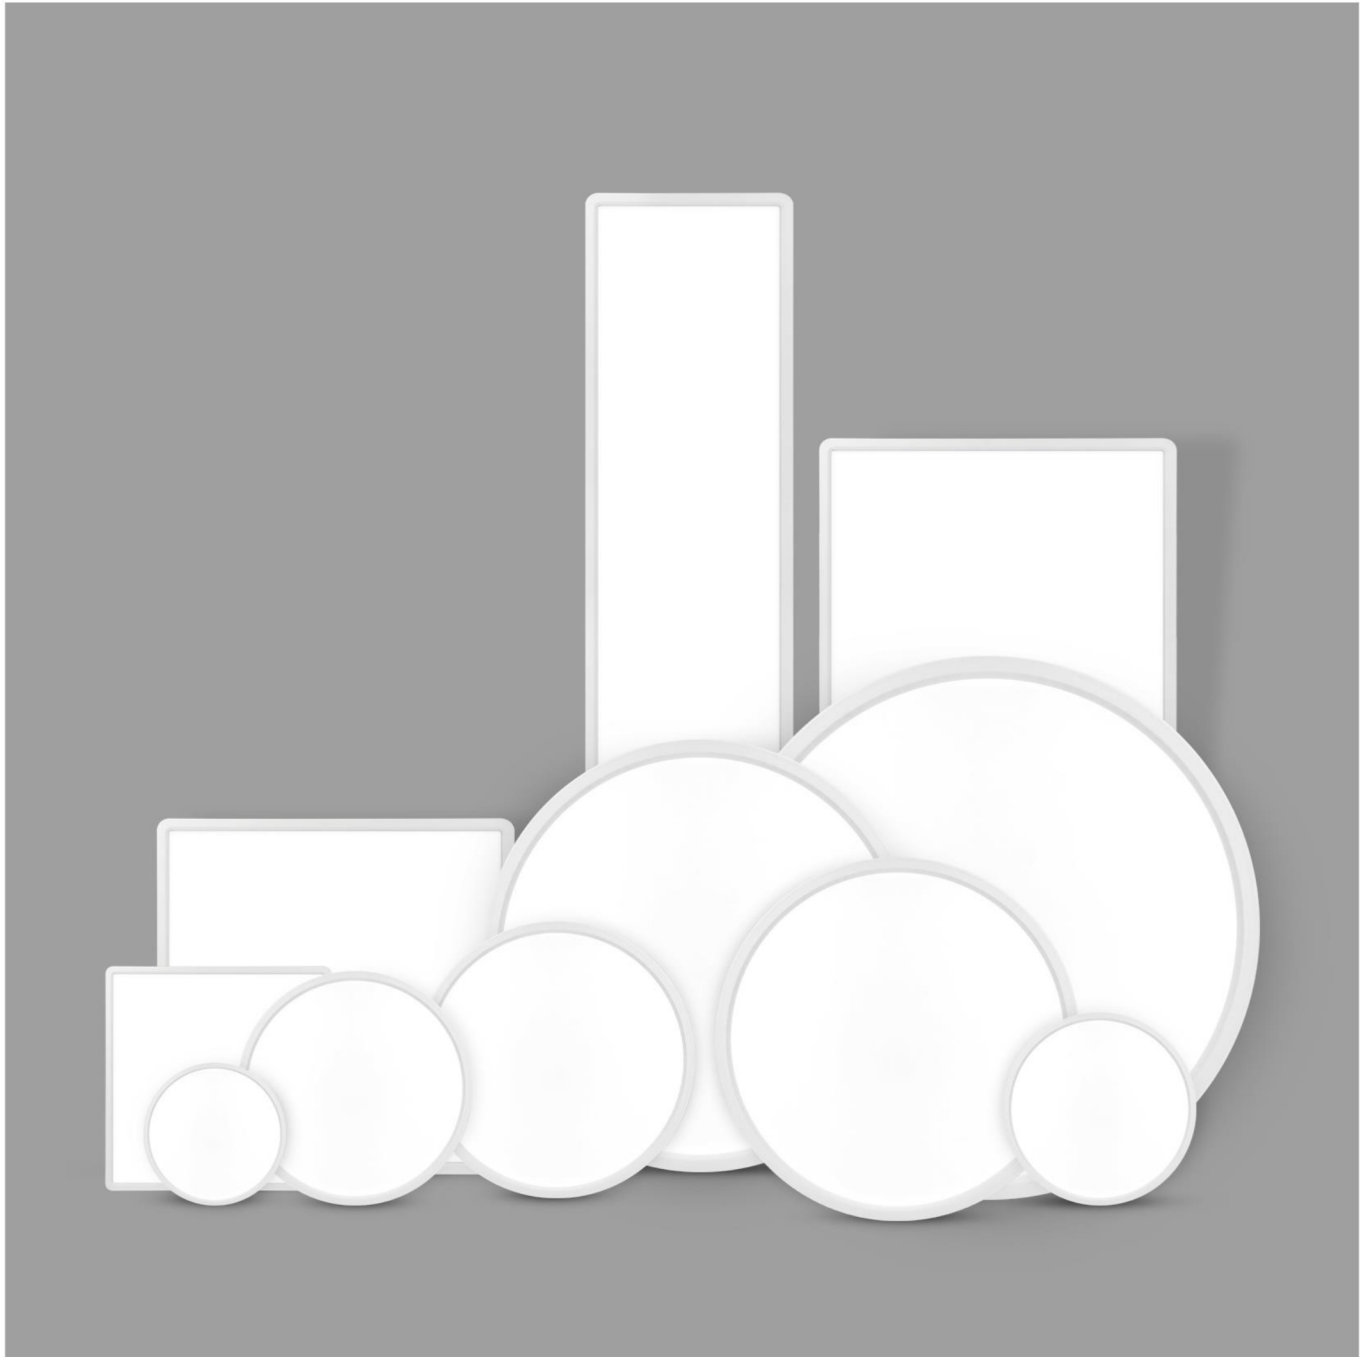

SURFACE CEILING LIGHT



Quick installation
Few seconds to
complete installation



Ultra-thin design
Only 2.4CM



Use LGP technology
Low UGR and Up to
150LM/W



SURFACE CEILING LIGHT



Fast Install
2.4CM ultrathin
More Than 120LM/W

/ Full Size /
18\23\30\40\48\60\80CM



APP



Alexa



Google Home




DIMMABLE
Triac / 0-10V / Pre-button



Shell Color



Motion Sensor




Tri-Color
Pre-Button / Switch


Air surface ceiling light



Model	Size	Power	Lumen	CCT	LED Brand	IP Rate
LV180	Φ180*24MM	12Watts	1400-1600LM	2800K/4000K/ 5000K/6500K	Epistar	IP40
LV230	Φ230*24MM	18Watts	2100-2300LM	2800K/4000K/ 5000K/6500K	Epistar	IP40
LV300	Φ300*24MM	24Watts	3050-3200LM	2800K/4000K/ 5000K/6500K	Epistar	IP40
LV400	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/ 5000K/6500K	Epistar	IP40
LV480	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/ 5000K/6500K	Epistar	IP40
LV600	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/ 5000K/6500K	Epistar	IP40
LV800	Φ800*24MM	64Watts	8000-8300LM	2800K/4000K/ 5000K/6500K	Epistar	IP40



works with the
Google Assistant

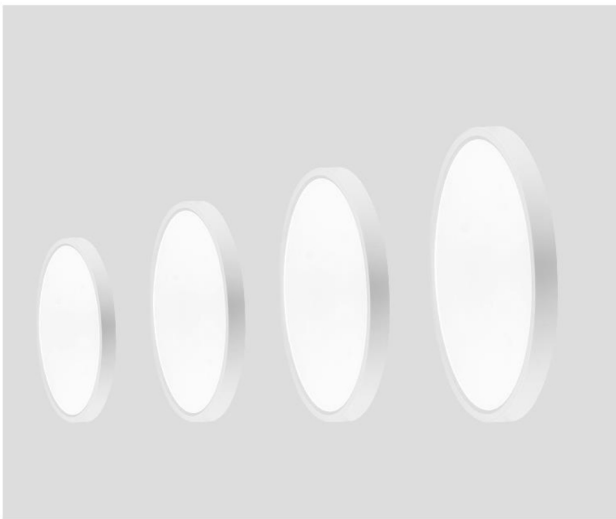

SMART SURFACE CEILING LIGHT



Model	Size	Power	Lumen	CCT	CRI	LED Brand	IP Rate
LV230S	Φ230*24MM	18Watts	2100-2300LM	2800-6500K	>Ra80	Epistar	IP40
LV300S	Φ300*24MM	25Watts	3050-3200LM	2800-6500K	>Ra80	Epistar	IP40
LV400S	Φ400*24MM	32Watts	3600-3800LM	2800-6500K	>Ra80	Epistar	IP40
LV480S	Φ480*24MM	36Watts	4300-4500LM	2800-6500K	>Ra80	Epistar	IP40
LV600S	Φ600*24MM	45Watts	5400-5600LM	2800-6500K	>Ra80	Epistar	IP40
LV800S	Φ800*24MM	64Watts	7500-7800LM	2800+6500K	>Ra80	Epistar	IP40

Surface Ceiling Light- Microwave




SURFACE MOUNTING CEILING LIGHT- MICROWAVE

Model	Size	Power
LV180	Φ180*24MM	12Watts
LV230	Φ230*24MM	18Watts
LV300	Φ300*24MM	24Watts

Lumen	CCT	CRI
1400-1600LM	2800K/4000K/5000K/6500K	>Ra80
2100-2300LM	2800K/4000K/5000K/6500K	>Ra80
2700-2900LM	2800K/4000K/5000K/6500K	>Ra80

LED Brand	Beam Angle	IP Rate
Epistar	120°	IP40
Epistar	120°	IP40
Epistar	120°	IP40

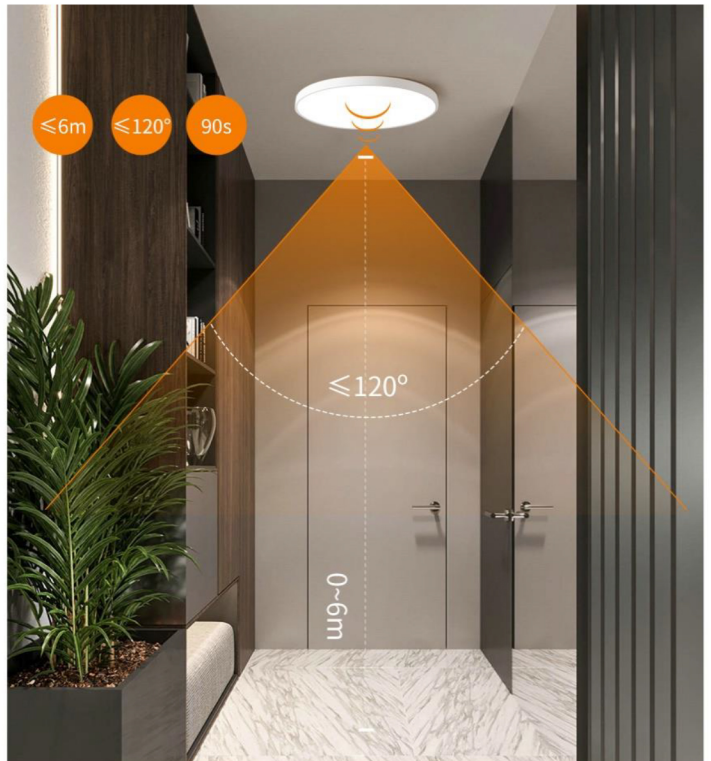

Surface ceiling light-CCT



CCT adjust by Button or Switch

Model	Size	Power	Lumen	CCT	Beam Angle	LED Brand	IP Rate
LV230C	Φ230*24MM	18Watts	2100-2300LM	2800K+4000K +6500K	120°	Epistar	IP40
LV300C	Φ300*24MM	24Watts	3050-3200LM	2800K+4000K +6500K	120°	Epistar	IP40
LV400C	Φ400*24MM	32Watts	3600-3800LM	2800K+4000K +6500K	120°	Epistar	IP40
LV480C	Φ480*24MM	36Watts	4300-4500LM	2800K+4000K +6500K	120°	Epistar	IP40
LV600C	Φ600*24MM	45Watts	5400-5600LM	2800K+4000K +6500K	120°	Epistar	IP40




Surface ceiling light- Dimming




Model	Size	Power	Lumen	CCT	Beam Angle	LED Brand	IP Rate
LV180T	Φ180*24MM	12Watts	1400-1600LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV230T	Φ230*24MM	18Watts	2100-2300LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV300T	Φ300*24MM	24Watts	3050-3200LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV400T	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV480T	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40
LV600T	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/5000K/6500K	120°	Epistar	IP40

TRIAC Dimmer

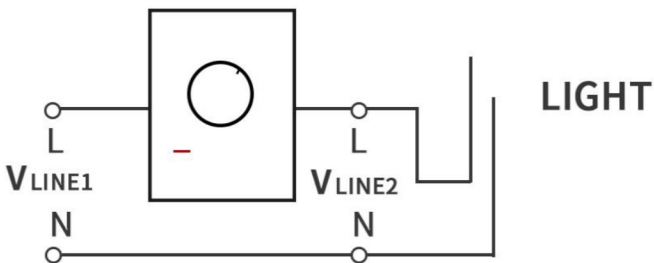

3 Step dimming

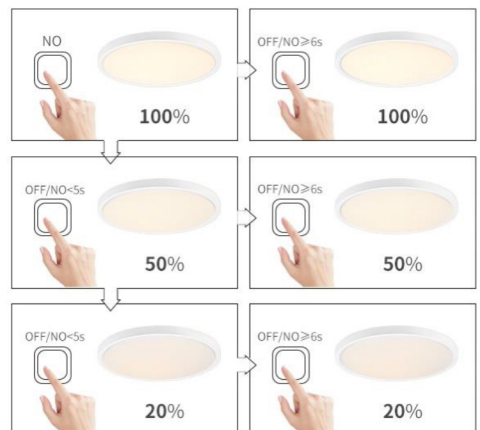

LUNA SERIES SURFACE CEILING LIGHT



Fast Install
2.4CM ultrathin
More Than 120LM/W

/ Full Size /
30/40/48/60CM



APP




Alexa



Google Home



Shell Color



Tri-Color
Pre-Button / Switch



DIMMABLE
Triac / Pre-button/off

LUNA SERIES SURFACE CEILING LIGHT



Normal Type

Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV300L	Φ300*24MM	24Watts	2800-2900LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV400L	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV480L	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV600L	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40

Dimmable Type By Triac dimmer or Switch ON\OFF



Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV300LT	Φ300*24MM	24Watts	2800-2900LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV400LT	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV480LT	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV600LT	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40

LUNA SERIES SURFACE CEILING LIGHT



Smart type by TUYA APP work with Echo or Google home



Model	Size	Power	Lumen	CCT	LED Brand	DriverType	CRI	BeamAngle	IP Rate
LV300LS	Φ300*24MM	24Watts	2800-2900LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV400LS	Φ400*24MM	32Watts	3600-3800LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV480LS	Φ480*24MM	36Watts	4300-4500LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV600LS	Φ600*24MM	45Watts	5400-5600LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40

Tri-Color adjust by Pre-set button or Switch



Model	Size	Power	Lumen	CCT	LED Brand	DriverType	CRI	BeamAngle	IP Rate
LV300LC	Φ300*24MM	24Watts	2800-2900LM	2800K+4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV400LC	Φ400*24MM	32Watts	3600-3800LM	2800K+4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV480LC	Φ480*24MM	36Watts	4300-4500LM	2800K+4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV600LC	Φ600*24MM	45Watts	5400-5600LM	2800K+4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40

LED PENDANT LIGHT - AIR SERIES



Normal Type

Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV300P	Φ300*24MM	24Watts	2800-2900LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV400P	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV480P	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40
LV600P	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/ 5000K/ 6500K	Epistar	Normal	>Ra80	120°	IP40

Dimmable Type By Triac dimmer or Switch ON\OFF



Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV300PT	Φ300*24MM	24Watts	2800-2900LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV400PT	Φ400*24MM	32Watts	3600-3800LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV480PT	Φ480*24MM	36Watts	4300-4500LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40
LV600PT	Φ600*24MM	45Watts	5400-5600LM	2800K/4000K/ 5000K/ 6500K	Epistar	Dimmable	>Ra80	120°	IP40


LED PENDANT LIGHT - AIR SERIES



Smart type by TUYA APP work with Echo or Google home

Model	Size	Power	Lumen	CCT	LED Brand	DriverType	CRI	BeamAngle	IP Rate
LV300PS	Φ300*24MM	24Watts	2800-2900LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV400PS	Φ400*24MM	32Watts	3600-3800LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV480PS	Φ480*24MM	36Watts	4300-4500LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40
LV600PS	Φ600*24MM	45Watts	5400-5600LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40

Tri-Color adjust by Pre-set button or Switch




Model	Size	Power	Lumen	CCT	LED Brand	DriverType	CRI	BeamAngle	IP Rate
LV300PC	Φ300*24MM	24Watts	2800-2900LM	2800K +4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV400PC	Φ400*24MM	32Watts	3600-3800LM	2800K +4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV480PC	Φ480*24MM	36Watts	4300-4500LM	2800K +4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40
LV600PC	Φ600*24MM	45Watts	5400-5600LM	2800K +4000K + 6500K	Epistar	Tri-Color	>Ra80	120°	IP40

SURFACE CEILING LIGHT



Fast Install
2.4CM ultrathin
More Than 120LM/W

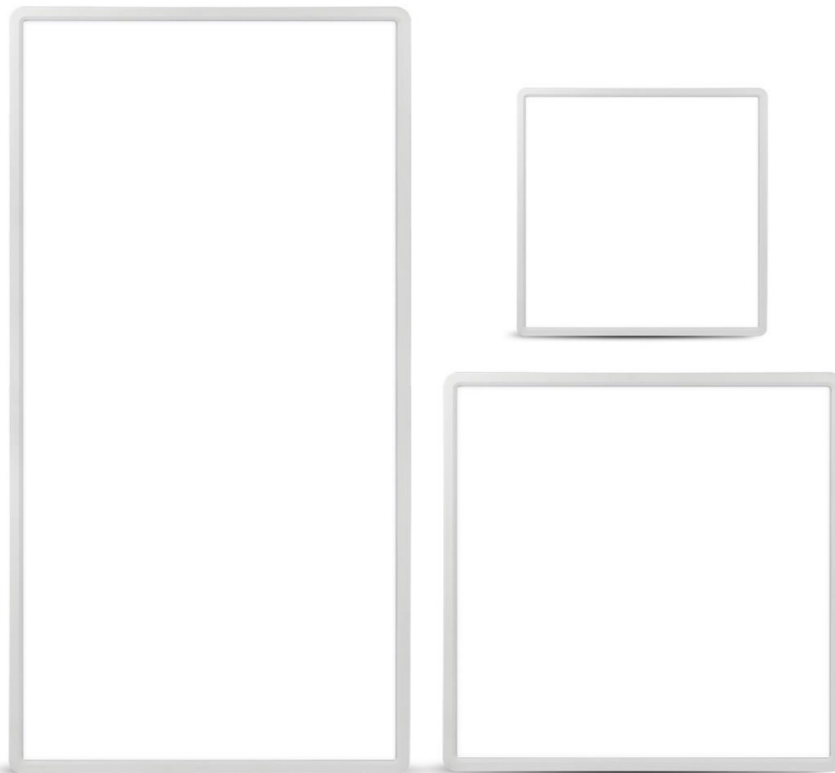

APP




Alexa



Google Home



Shell Color




Tri-Color
Pre-Button / Switch



DIMMABLE

· Triac / 0-10V / Pre-button

64WATT SURFACE CEILING LIGHT-RECTANGLE

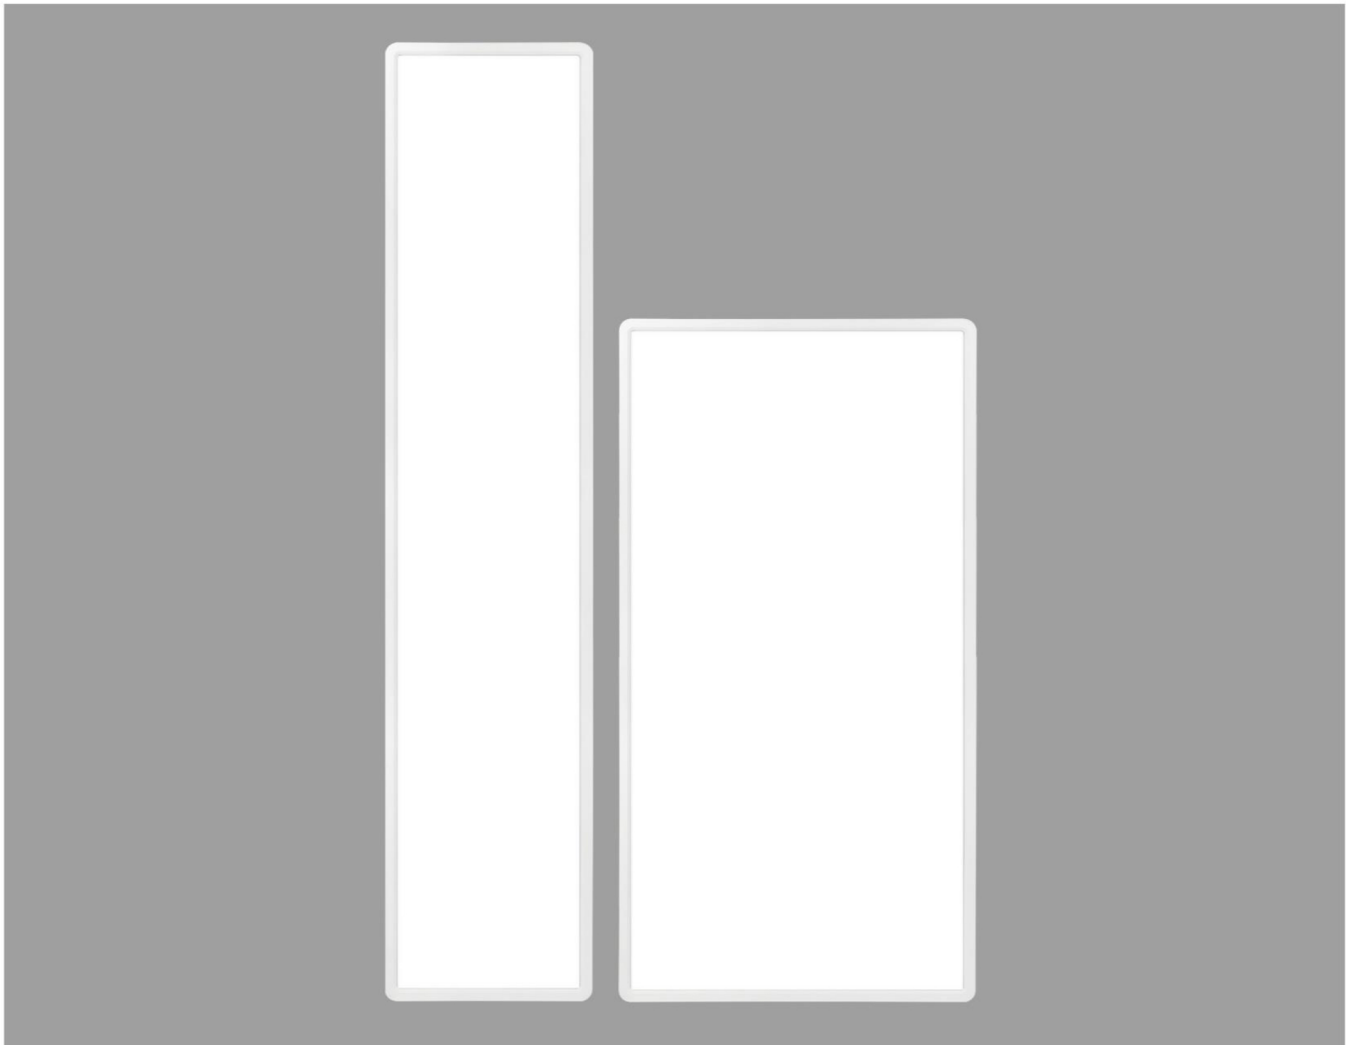

Smart type by TUYA APP work with Echo or Google home   

Model	Size	Power	Lumen	CCT	LED Brand	DriverType	CRI	BeamAngle	IP Rate
LV960S	L960*W600* H24MM	64Watt	7500-7800LM	2800K + 6500K	Epistar	Smart	>Ra80	120°	IP40

Smart type by TUYA APP work with Echo or Google home   

Model	Size	Power	Lumen	CCT	LED Brand	DriverType	CRI	BeamAngle	IP Rate
LV1200S	L1200*W300* H24MM	64Watt	7500-7800LM	2800K + 6500K	Epistar	Smart	>Ra80	120°	IP40

SURFACE CEILING LIGHT-SQUARE




Smart type by TUYA APP work with Echo or Google home



Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LF300S	L300*W300 *H24MM	24Watts	3050-3200LM	2800K/4000K/	Epistar	Smart	>Ra80	120°	IP40

Smart type by TUYA APP work with Echo or Google home



Model	Size	Power	Lumen	CCT	LED Brand	Driver Type	CRI	Beam Angle	IP Rate
LV450S	L450*W450 *H24MM	45Watts	5400-5600LM	2800K - 6500K	Epistar	Smart	>Ra80	120°	IP40



Berelli