



Berelli

RECESSED P.4

SURFACE MOUNTED P.8

DECORATIVE P.10

STRIP LIGHTS P.20

DRIVERS P.22

ALUMINUM CHANNEL P.23



Slim LED Downlight




CLICK





Recessed

Slim LED Downlight

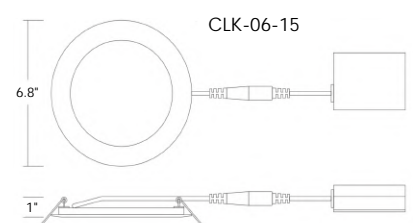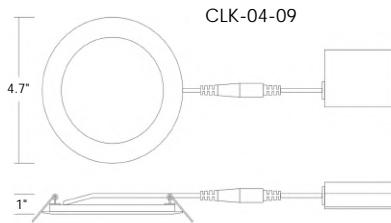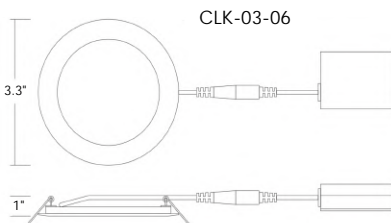

Model	Size	Watts	Delivered lumens	CRI	CCT	Voltage
CLK-03-06	3"	6 W	450 lm	80	3000K / 4000K / 5000K	120 V
CLK-04-09	4"	9 W	700 lm	80	3000K / 4000K / 5000K	120 V
CLK-06-15	6"	15 W	1125 lm	80	3000K / 4000K / 5000K	120 V

Specifications

Includes junction box & insulated class 2 dimmable driver
 Can be daisy chained
 Dimmable
 50000+ hours rated lifetime
 120° Beam Angle
 3 year warranty

Finish
 WH - White
 BK - Black
 SN - Satin Nickel

Order Example
 CLK-04-09-3K-WH



LED Downlight


VENESEA





Recessed

LED Downlight

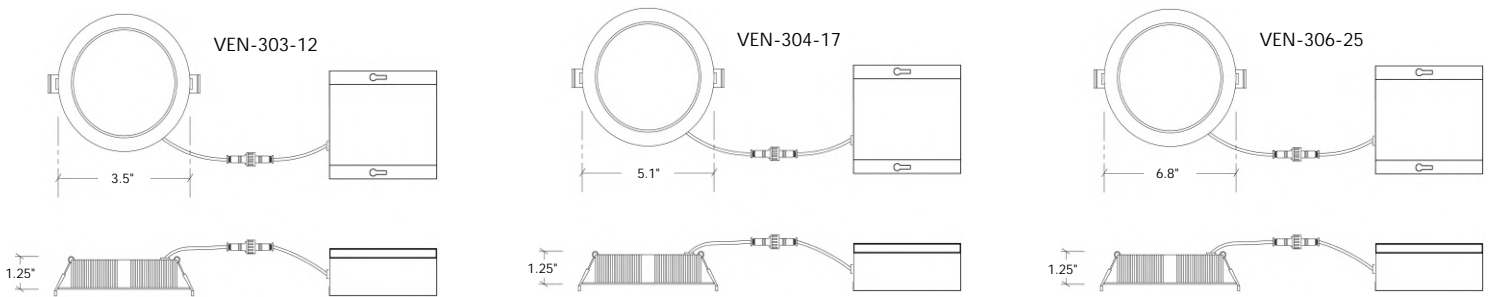

Model	Size	Watts	Delivered lumens	CRI	CCT	Voltage
VEN-303-12	3"	12 W	900 lm	80	3000K - 4000K - 6000K	120 V
VEN-304-17	4"	17 W	1400 lm	80	3000K - 4000K - 6000K	120 V
VEN-306-25	6"	25 W	2200 lm	80	3000K - 4000K - 6000K	120 V

Specifications

Kelvin changeable - adjust CCT by switch on junction box
 High lumen output
 Dimmable
 50000+ hours rated lifetime
 Die-cast aluminum construction
 5 year warranty

Finish
 WH - White
 BK - Black

Order Example
 VEN-304-17-WH




LED Downlight

ALINA





LED Downlight

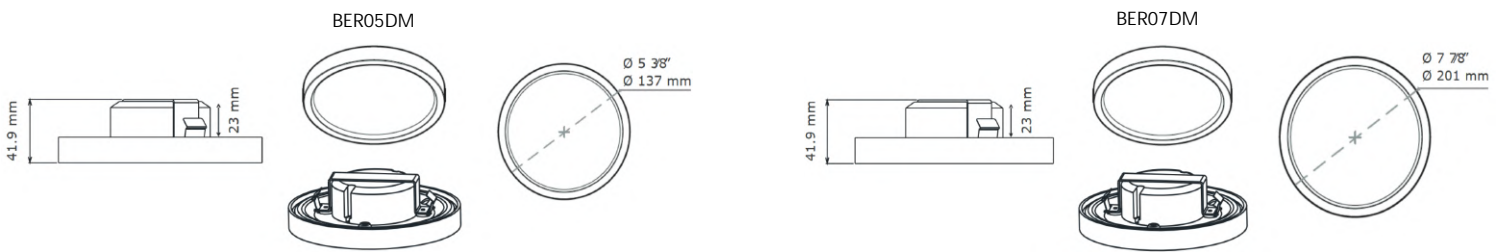

Model	Size	Watts	Delivered lumens	CRI	CCT	Voltage
BER05DM	5"	10.5 W	850 lm	80 / 90 / 95	3000K / 4000K / 5000K	120 V
BER07DM	7"	14.2 W	1200 lm	80 / 90 / 95	3000K / 4000K / 5000K	120 V

Specifications

Mounted onto 4" octagon junction box
 Anti-glare lens - Reduces strain on the eyes
 Wet location approved IP54
 Dimmable
 50000+ hours rated lifetime
 3 year warranty

Finish
 WH - White
 BK - Black




Order Example
 BER05DM-90-3K-WH






Decorative

CORA

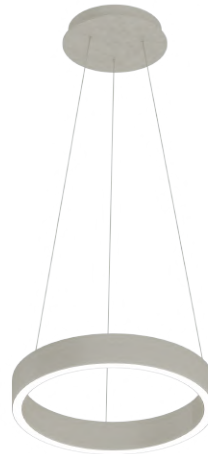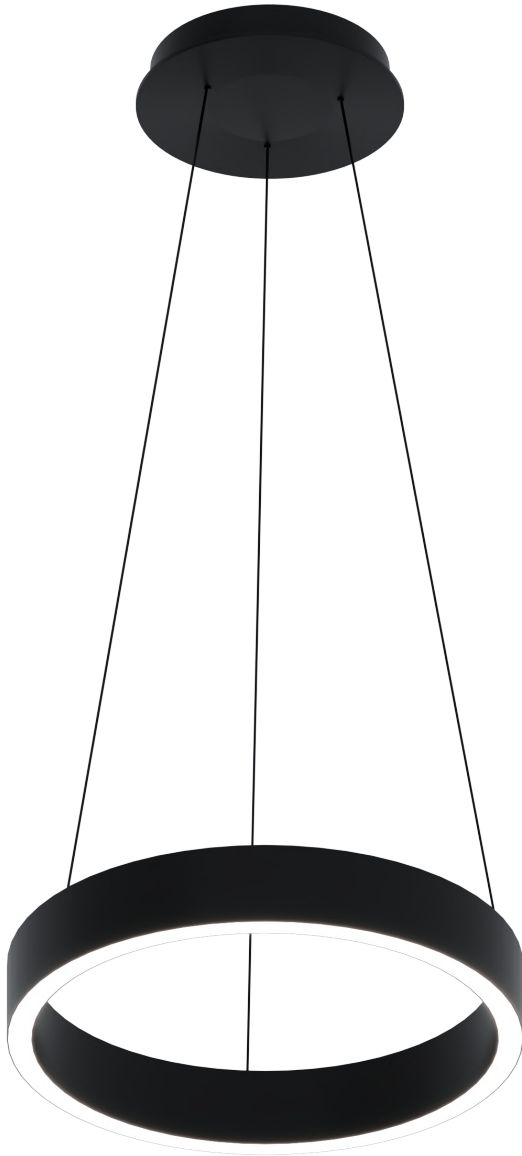

15"

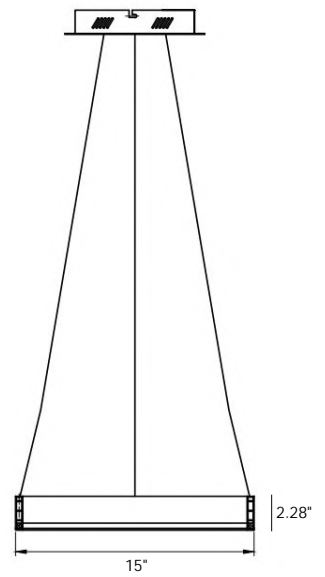

Model	Dimming	Watts	Delivered lumens	CRI	CCT	Voltage
BER8136	100% - 10%	33 W	1400 lm	90	3000K / 4000K / 5000K	120 V

Specifications

Dimmable with ELV or TRIAC dimmer
 Max. cable length of 60"
 Aluminum construction
 50000+ hours rated lifetime
 Custom options available
 5 year warranty

Finish

WH - White
 BK - Black
 BN - Brushed Nickel

Order Example




CORA-90-3K-WH





Decorative

CAROLINA

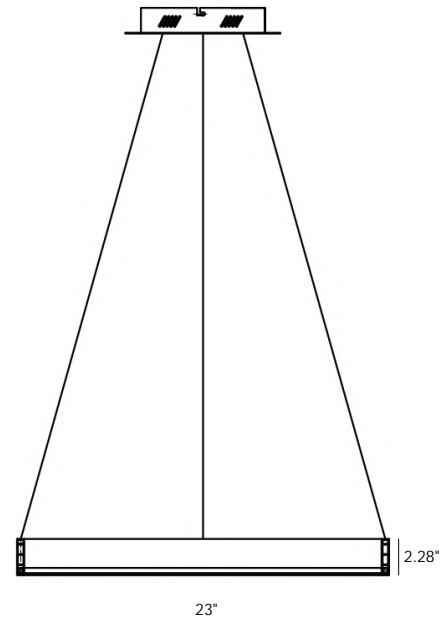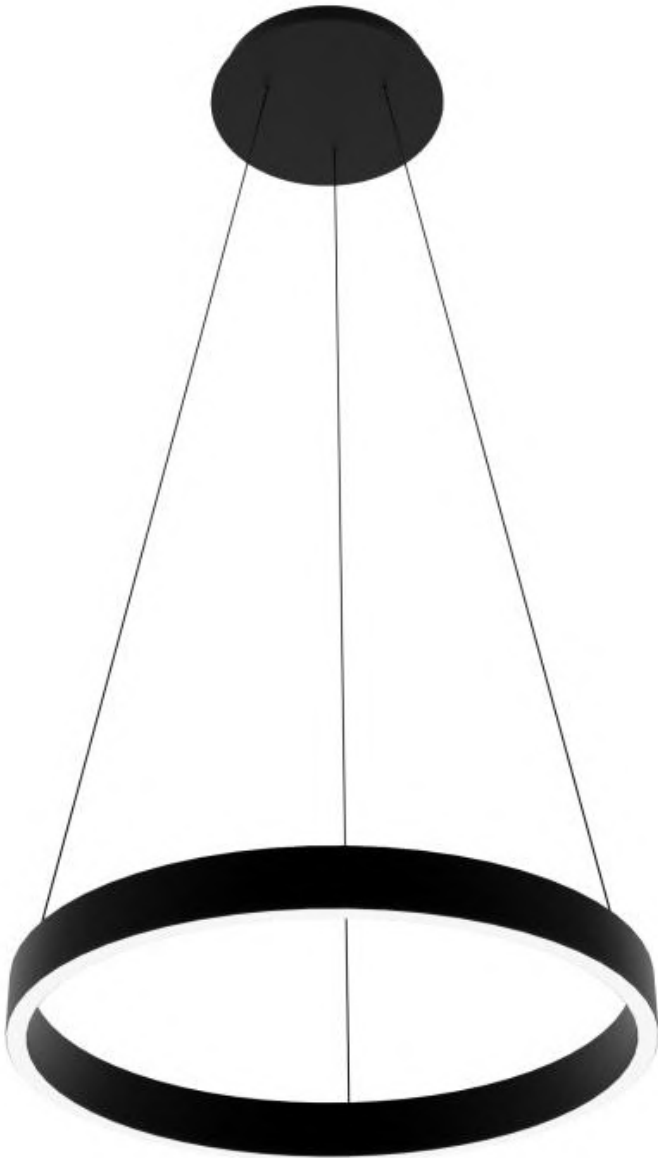

Model	Dimming	Watts	Delivered lumens	CRI	CCT	Voltage
BER8137	100% - 10%	45 W	2900 lm	90	3000K / 4000K / 5000K	120 V

Specifications

Dimmable with ELV or TRIAC dimmer
 Max. cable length of 60"
 Aluminum construction
 50000+ hours rated lifetime
 Custom options available
 5 year warranty

Finish

WH - White
 BK - Black
 BN - Brushed Nickel

Order Example




CORA-90-3K-WH





Decorative

BARSILIO

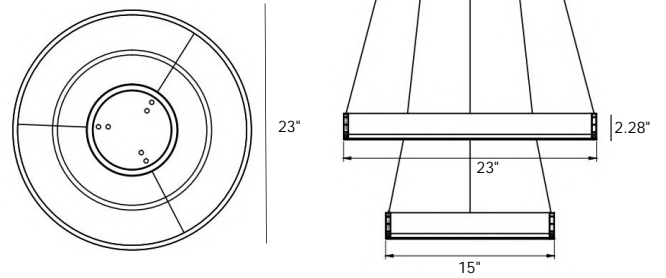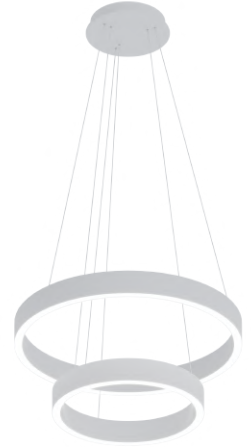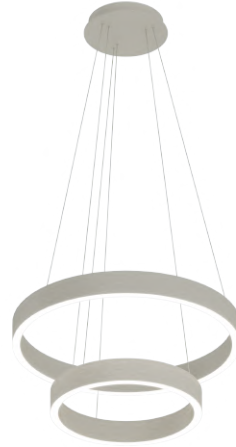

Model	Dimming	Watts	Delivered lumens	CRI	CCT	Voltage
BER8138	100% - 10%	78 W	3800 lm	90	3000K / 4000K / 5000K	120 V

Specifications

Dimmable with ELV or TRIAC dimmer
 Max. cable length of 60"
 Aluminum construction
 50000+ hours rated lifetime
 Custom options available
 5 year warranty

Finish

WH - White
 BK - Black
 BN - Brushed Nickel

Order Example

BARSILIO-90-3K-WH







RISE
&
SHINE



Decorative

ARTURA

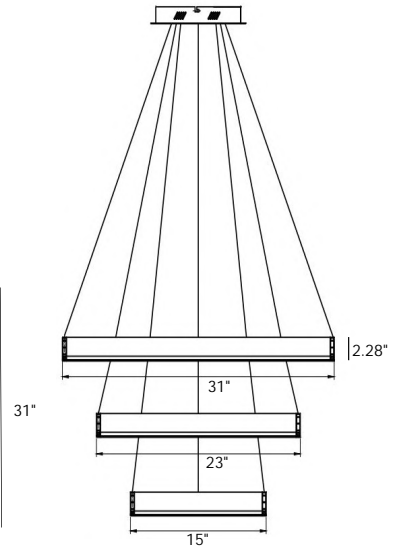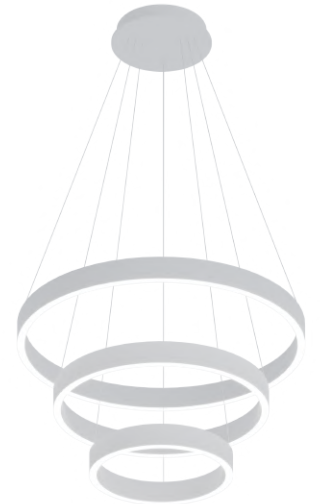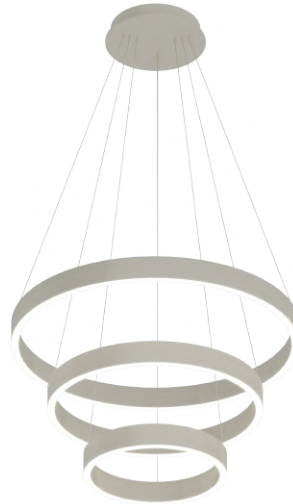

Model	Dimming	Watts	Delivered lumens	CRI	CCT	Voltage
BER8139	100% - 10%	130 W	7800 lm	90	3000K / 4000K / 5000K	120 V

Specifications

Dimmable with ELV or TRIAC dimmer
 Max. cable length of 60"
 Aluminum construction
 50000+ hours rated lifetime
 Custom options available
 5 year warranty

Finish

WH - White
 BK - Black
 BN - Brushed Nickel

Order Example

ARTURA-90-3K-WH






Decorative


ORLANDO



BER8151

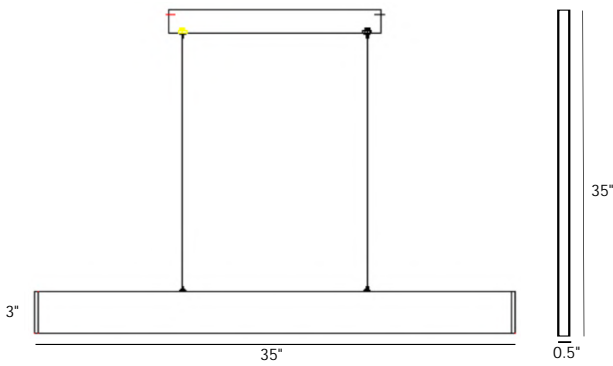

BER8152

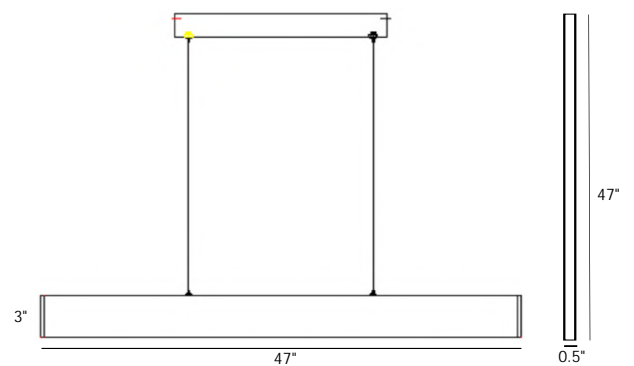

Model	Dimming	Watts	Delivered lumens	CRI	CCT	Voltage
BER8151	100%-10%	32 W	1200 lm	97	3000K / 4000K / 5000K	120 V
BER8152	100%-10%	45 W	1650 lm	97	3000K / 4000K / 5000K	120 V

Specifications

Dimmable with ELV or TRIAC dimmer
 Max. cable length of 50"
 Aluminum construction
 50000+ hours rated lifetime
 Custom options available
 5 year warranty

Finish

WH - White
 BK - Black
 BN - Brushed Nickel

Order Example


ORLANDO-90-3K-WH




LED Strip Lighting




64

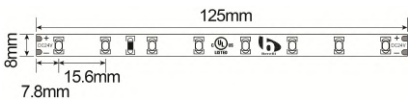

128

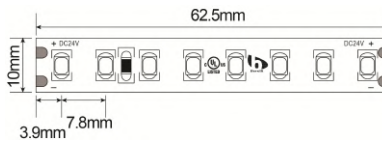

176

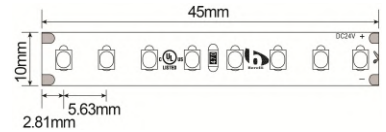

Name	Model	LED / Meter	Watts / Meter	Lumens / Meter	CRI	CCT	Voltage
64	AMW-S28126008	64	5 W	750 lm	80 / 90	2700K / 3000K / 4000K	24 V
128	AMW-S282412810	128	10 W	1450 lm	80 / 90	2700K / 3000K / 4000K	24 V
176	AMW-S282416810	176	16 W	2200 lm	80 / 90	2700K / 3000K / 4000K	24 V

Specifications

Available in 5 meter (16.4ft) lengths
 High efficiency 155 lm/w
 Durable Blue-Tape adhesive
 50000+ hours rated lifetime
 Dimming with dimmable driver or smart controller
 5 year warranty

Environmental Rating

IP20 - Indoor
 IP65 - Outdoor

Order Example


AMW-S28126008-20-80-3K



LED STRIP LIGHTING



RGBW

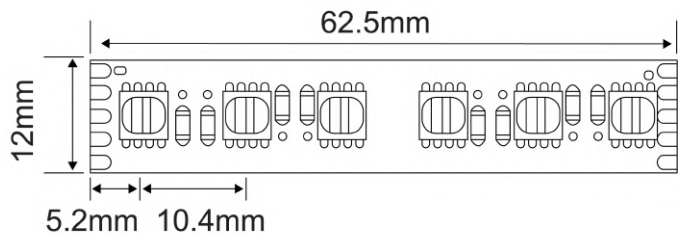

Name	Model	LED / Meter	Watts / Meter	Lumens / Meter	CRI	CCT	Voltage
RGBW	AMW-H50246012	60	20 W	1000 lm	80	3000K + RGB	24 V

Specifications

Available in 5 meter (16.4ft) lengths
 16 million color variations
 Durable Blue-Tape adhesive
 50000+ hours rated lifetime
 Dimming and color control with smart controller
 5 year warranty

Environmental Rating

IP20 - Indoor
 IP65 - Outdoor

Order Example

AMW-H50246012-20



LED Drivers



Model	Wattage	Voltage	IP Rating	Dimmable	Class 2	Warranty
APV-16-24	16 W	24 V	IP42	No	Yes	2 Year
APV-35-24	35 W	24 V	IP42	No	Yes	2 Year
ELG-75-24	75 W	24 V	IP65	No	Yes	5 Year
ELG-100-24	100 W	24 V	IP65	No	Yes	5 Year
ELG-150-24	150 W	24 V	IP65	No	No	5 Year
HLG-80H-24	80 W	24 V	IP67	Yes	Yes	7 Year
HLG-120H-24	120 W	24 V	IP67	Yes	No	7 Year
HLG-150H-24	150 W	24 V	IP67	Yes	No	7 Year

Specifications

Designed to be used with LED strip lights
 Short circuit protection - restarts automatically after fault condition is removed
 Over - current, voltage & temperature protection
 Indoor & outdoor models
 Higher wattages available by request



Order Example
 APV-35-24




Aluminum Channel





ALM-1514



ALM-3535

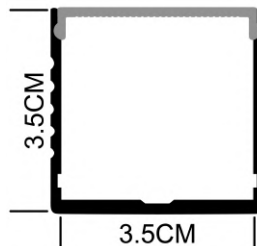

ALM-C1516

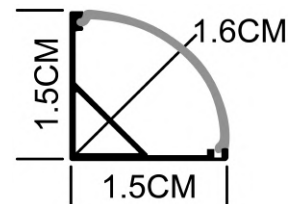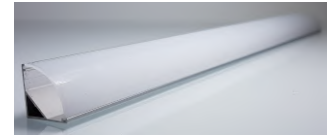

Model	Available Lengths
-------	-------------------

ALM-1514	2 meter
ALM-3535	2 meter
ALM-C1516	2 meter

Specifications

Anodized aluminum channel
 Shatter proof acrylic lens
 Available in 2 meter (6.56ft) lengths
 High-heat resistance - Stops LED Strips from over-heating
 End caps and mounting clips available

Finish
 Silver

Order Example
 ALM-1514